

ENVIRONMENTAL PRODUCT DECLARATION

In accordance with ISO 14025 and EN 15804+A2

SCHWENK Zement GmbH & Co. KG
CEM II/A-LL 42,5 R - Bernburg - 0840-CPR-3040-236100-18





Owner of the declaration

SCHWENK Zement GmbH & Co. KG Hindenburgring 15 89077 Ulm Germany

Product

CEM II/A-LL 42,5 R - Bernburg - 0840-CPR-3040-236100-18

Declared product / Declared unit 1 t of CEM II/A-LL 42,5 R - Bernburg -

0840-CPR-3040-236100-18

This declaration is based on Product Category Rules

EN 15804:2012 + A2:2019, EN 16908:2017+A1:2022: Cement and building lime - Environmental product declarations - Product category rules complementary to EN 15804

Program operator:

EPD Norway Majorstuen P.O. Box 5250 N-0303 Oslo Norway

Declaration number NEPD-10078-10078-2

Registration number NEPD-10078-10078-2

Issue date 04.04.2025

04.04.2023

Valid to 03.04.2030

EPD Software Emidat EPD Tool v1.0.0

General Information

Product

CEM II/A-LL 42,5 R - Bernburg - 0840-CPR-3040-236100-18

Program Operator

EPD Norway Majorstuen P.O. Box 5250 N-0303 Oslo Norway

Phone: +47 23 08 80 00 Email: post@epd-norge.no

Declaration Number

NEPD-10078-10078-2

This declaration is based on Product Category Rules

EN 15804:2012 + A2:2019,

EN 16908:2017+A1:2022: Cement and building lime - Environmental product declarations - Product category rules complementary to EN 15804

Statements

The owner of the declaration shall be liable for the underlying information and evidence. EPD Norway shall not be liable with respect to manufacturer, life cycle assessment data and evidences.

Declared unit

1 t of CEM II/A-LL 42,5 R - Bernburg - 0840-CPR-3040-236100-18

General information on verification of EPD from EPD tools

Independent verification of data, other environmental information and the declaration according to ISO 14025:2010, § 8.1.3 and § 8.1.4. Verification of each EPD is made according to EPDNorway's guidelines for verification and approval requiring that tools are i) integrated into the company's environmental management system, ii) the procedures for use of the EPD tool are approved by EPD-Norway, and iii) the process is reviewed annually by an independent third party verifier. See Appendix G of EPD-Norway's General Programme Instructions for further information on EPD tools.

Verification of EPD tool

Charlotte Merlin, FORCE Technology (no signature required)

Owner of the declaration

SCHWENK Zement GmbH & Co. KG

Contact person

info@schwenk.de

Phone

+497319341-0

Email

info@schwenk.de

Manufacturer

SCHWENK Zement GmbH & Co. KG Hindenburgring 15 89077 Ulm, Germany

Place of production

Bernburg, Germany

Management system

ISO 9001, ISO 14001, ISO 50001

Organisation no

Registereintragung: HRA 1955, Amtsgericht Ulm

Issue date

04.04.2025

Valid to

03.04.2030

Year of study

2023

Comparability

EPDs of construction products may not be comparable if they do not comply with EN 15804 and are not seen in a building context. EPD data may not be comparable if the datasets used are not developed in accordance with EN 15804 and if the background systems are not based on the same database (including primary and secondary data).

Development and verification of EPD

The declaration was created using the Emidat EPD tool v1.0, developed by Emidat GmbH. The EPD tool has been approved by EPD Norway.

Developer of EPD: Dr. Klaus Raiber Reviewer of company-specific input data and EPD: Thomas Arndt

Approved

Håkon Hauan, CEO EPD-Norge

Product

Product description

Cement is a hydraulically hardening binder for the production of concrete and mortar. It is a mixture of finely ground, non-metallic and inorganic components. After adding water to the cement, a suspension (cement paste) is formed, which solidifies and hardens both in air and under water due to the hydration reaction that then begins and remains permanently solid. The composition of the product complies with the specifications of EN 197-1.



Cement is the key ingredient in concrete. When mixed with water and aggregates such as sand and gravel, it forms a paste that binds the aggregates together to create concrete, the most widely used construction material in the world.

Cement can also be mixed with sand and water to create mortar or grout, used as a bonding agent between bricks, stones, or concrete blocks in masonry construction. Cement can also be used to stabilise and improve the properties of soil in construction projects. Soil-cement mixtures are created by mixing cement with soil to increase its strength, durability, and load-bearing capacity. This technique is commonly used in road construction, building foundations, and slope stabilisation.

Product specification

| Name of ingredient | Share of total weight | Country of origin |
|--------------------|-----------------------|-------------------|
| Additives | 0 - 6 % | Germany |
| Admixtures | 0 - 6 % | Germany |
| Clinker | 65 - 80 % | Germany |
| Gypsum | 0 - 6 % | Germany |
| Natural aggregates | 6 - 20 % | Germany |

Technical data

| | Unit | Value |
|---|---------|--------|
| Compressive Strength (Prisms, EN 196-1) | N / mm² | 42.5 |
| Density | kg / m³ | 2850.0 |

Market

Germany

Reference service life

This study does not cover the use stage. Thus, the reference service life is irrelevant.


LCA: Calculation rules

Declared unit

1 t of CEM II/A-LL 42,5 R - Bernburg - 0840-CPR-3040-236100-18

System boundary



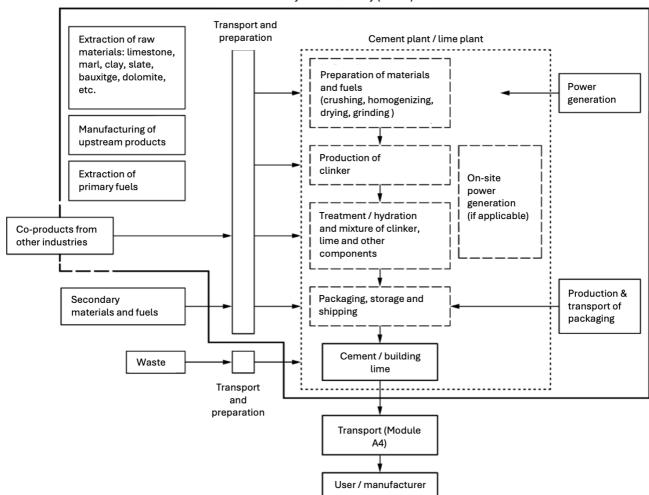

Data quality

The Emidat EPD Tool v1.0.0 was used for LCA modeling and calculation. Background data was used from ecoinvent database v3.10.

System boundaries (X=included, MND=module not declared)

| | Pro | oducti | ion | Instal | lation | | | U | se staç | ge | | | | End-c | of-Life | | Next product system |
|---------------------|---------------------|-----------|---------------|-----------|----------------------|-----|-------------|--------|-------------|---------------|------------------------|-----------------------|------------|-----------|------------------|----------|--|
| | Raw material supply | Transport | Manufacturing | Transport | Installation Process | Use | Maintenance | Repair | Replacement | Refurbishment | Operational Energy Use | Operational Water Use | Demolition | Transport | Waste Processing | Disposal | Benefits and loads beyond the system boundary |
| Module | A1 | A2 | АЗ | A4 | A5 | B1 | В2 | В3 | B4 | В5 | В6 | В7 | C1 | C2 | С3 | C4 | D |
| Modules declared | х | х | х | MND | MND | MND | MND | MND | MND | MND | MND | MND | MND | MND | MND | MND | MND |
| Geography | | | DE | MND | MND | MND | MND | MND | MND | MND | MND | MND | MND | MND | MND | MND | MND |

For the geographies modeled in A1 and A2, refer to Product specification.

Type of EPD: cradle to gate (A1-A3)

Stage of Material Production and Construction

Module A1: Extraction and processing of cement raw materials Module A2: Transportation of raw materials to the cement plant Module A3: Cement production at the plant and waste treatment

Cut-off criteria

No cut-offs were applied.

Allocation

Elementary flows (energy and fuels, ancillary materials and waste) data was collected on production-process-level. Using the total output of the production process in 2023, elementary flows are assigned to 1 declared unit based on mass.

LCA: Results

Core environmental impact indicators

| Indicator | Unit | A1-3 |
|----------------|-------------------------|-------------------------|
| GWP-total | kg CO₂-eq. | 6.59e+02 (4.70e+02)* |
| GWP-fossil | kg CO₂-eq. | 5.84e+02 (4.66e+02)* |
| GWP-biogenic | kg CO₂-eq. | 7.54e+01 (4.51e+00)* |
| GWP-Iuluc | kg CO₂-eq. | 8.78e-02 |
| ODP | kg CFC-11-Eq | 5.02e-07 |
| AP | mol H+-Eq | 8.80e-01 |
| EP-freshwater | kg P-Eq | 9.66e-02 |
| EP-marine | kg N-Eq | 2.28e-01 |
| EP-terrestrial | mol N-Eq | 2.56e+00 |
| POCP | kg NMVOC-Eq | 6.55e-01 |
| ADPE | kg Sb-Eq | 1.79e-03 |
| ADPF | MJ, net calorific value | 2.70e+03 |
| WDP | m³ world Eq deprived | 1.20e+01 |

GWP-total: Global Warming Potential - total **GWP-fossi**!: Global warming potential - fossil **GWP-biogenic**: Global Warming Potential - biogenic **GWP-luluc**: Global Warming Potential - luluc **ODP**:

Depletion potential of the stratospheric ozone layer **AP**: Acidification potential, Accumulated Exceedance **EP-freshwater**: Eutrophication potential - freshwater **EP-marine**: Eutrophication potential - marine **EP-terrestrial**: Eutrophication potential - terrestrial **POCP**: Photochemical Ozone Creation Potential **ADPE**: Abiotic depletion potential - non-fossil resources **ADPF**: Abiotic depletion potential - fossil resources **WDP**: Water (user) deprivation potential

Additional indicators

| Indicator | Unit | A1-3 |
|-----------|-------------------|----------|
| PM | disease incidence | 8.85e-06 |
| IRP | kBq U235-Eq | 1.05e+01 |
| ETP-fw | CTUe | 2.54e+02 |
| HTP-c | CTUh | 1.36e-07 |
| HTP-nc | CTUh | 3.11e-06 |
| SQP | dimensionless | 1.56e+02 |

PM: Potential incidence of disease due to PM emissions IRP: Potential Human exposure efficiency relative to U235 ETP-fw: Potential Comparative Toxic Unit for ecosystems HTP-c: Potential Comparative Toxic Unit for humans - cancer effects HTP-nc: Potential Comparative Toxic Unit for humans - non-cancer effects SQP: Potential Soil quality index

IRP: This impact category deals mainly with the eventual impact of low dose ionizing radiation on human health of the nuclear fuel cycle. It does not consider effects due to possible nuclear accidents, occupational exposure nor due to radioactive waste disposal in underground facilities. Potential ionizing radiation from the soil, from radon and from some construction materials is also not measured by this indicator.

^{*} The first value is the gross value, it includes the impacts from all manufacturing activities. Gross values are more commonly used in Northern Europe. The value in brackets is the net value, it excludes the impact from the incineration of waste-derived fuels, and is more common in Central Europe and Germany.

ETP-fw, **HTP-c**, **HTP-nc** and **SQP**: The results of these environmental impact indicators shall be used with care as the uncertainties on these results are high or as there is limited experienced with these indicators.

Use of resources

| Indicator | Unit | A1-3 |
|-----------|------|----------|
| PERE | MJ | 8.55e+02 |
| PERM | MJ | 0 |
| PERT | MJ | 8.55e+02 |
| PENRE | MJ | 2.70e+03 |
| PENRM | MJ | 2.18e+00 |
| PENRT | MJ | 2.70e+03 |
| SM | kg | 0 |
| RSF | MJ | 5.41e+02 |
| NRSF | MJ | 8.28e+02 |
| FW | m³ | 4.02e-01 |

PERE: Primary energy resources - renewable: use as energy carrier PERM: Primary energy resources - renewable: used as raw materials PERT: Primary energy resources - renewable: total PENRE: Primary energy resources - non-renewable: used as raw materials PERT: Primary energy resources - non-renewable: used as raw materials PERT: Primary energy resources - non-renewable: total SM: Use of secondary material RSF: Renewable secondary fuels NRSF: Non-renewable secondary fuels FW: Net use of fresh water

Waste flows

| Indicator | Unit | A1-3 |
|-----------|------|----------|
| HWD | kg | 1.85e+00 |
| NHWD | kg | 4.70e+02 |
| RWD | kg | 3.09e-03 |

 $\textbf{HWD}: \textbf{Hazardous waste disposed NHWD}: \textbf{Non hazardous waste disposed RWD}: \textbf{Radioactive waste disposed RWD}: \textbf{Non hazardous waste disposed RWD}: \textbf{Radioactive waste disposed RWD}: \textbf{Non hazardous waste disposed RWD}: \textbf{Radioactive waste disposed RWD}: \textbf{Non hazardous waste disposed RWD}: \textbf{Radioactive waste disposed RWD}: \textbf{Non hazardous waste disposed RWD}: \textbf{Radioactive waste disposed RWD}: \textbf{Non hazardous waste disposed RWD}: \textbf{Non hazardou$

Output flows

| Indicator | Unit | A1-3 |
|-----------|------|------|
| CRU | kg | 0 |
| MFR | kg | 0 |
| MER | kg | 0 |
| EEE | MJ | 0 |
| EET | MJ | 0 |

CRU: Components for re-use MFR: Materials for recycling MER: Materials for energy recovery EEE: Exported electrical energy EET: Exported thermal energy

| Name | Value | Unit |
|---|-------|------|
| Biogenic carbon content in product | 0 | kg C |
| Biogenic carbon content in accompanying packaging | 0 | kg C |

Additional requirements

Greenhouse gas emissions from the use of electricity in the manufacturing phase

Electricity consumption in the manufacturing phase is composed from the source below. Electricity is represented by data in ecoinvent 3.10 regionalised for Germany.

| Electricity | Unit | Value |
|-----------------------|-------------------------------|-------|
| Electricity from grid | kg CO ₂ -eq. / kWh | 0.47 |

Dangerous substances

The product contains no substances given by the REACH candidate list.

Additional environmental information

Additional environmental impact indicators required in NPCR Part A for construction products

| Indicator | Unit | A1-3 |
|-----------|-------------------------|----------|
| GWP-IOBC | kg CO ₂ -eq. | 4.29e+02 |

GWP-IOBC: Global Warming Potential - Instantaneous oxidation of biogenic carbon

Bibliography

DIN EN ISO 14025:2011-10 DIN EN ISO 14040:2021-02 DIN EN ISO 14044:2021-02

EN 15804:2012+A2:2019 DIN CENTR 15941:2010-11

DIN EN 15942:2022-04

ISO 21930:2017-07

Ecoinvent v3.10

PCR

EN 16908:2017+A1:2022

Environmental labels and declarations - Type III environmental declarations - Principles and procedures

Environmental management - Life cycle assessment - Principles and framework

Environmental management - Life cycle assessment - Requirements and guidelines

Sustainability of construction works - Environmental product declarations - Core rules for the product category of construction products

Sustainability of construction works - Environmental product declarations - Methodology for selection and use of generic data

Sustainability of construction works - Environmental product declarations - Communication format business-to-business

Sustainability in buildings and civil engineering works - Core rules for environmental product declarations of construction products and services

ecoinvent, Zurich, Switzerland, database version 3.10

EN 16908:2017+A1:2022: Cement and building lime - Environmental product declarations - Product category rules complementary to EN 15804

Cement and building lime - Environmental product declarations - Product category rules complementary to EN 15804

Basic principles and recommendations for describing the dismantling, post use, and disposal stage of construction products: https://www.umweltbundesamt.de/sites/default/files/medien/1410/publikationen/2020-07-06_texte_130-2020_guidance-document-construction-industry.pdf

 $ILCD\ Handbook: https://eplca.jrc.ec.europa.eu/uploads/ILCD-Handbook-LCIA-Background-analysis-online-12 March 2010.pdf$

| | Program Operator | Phone | +47 23 08 80 00 |
|-------------------------|---------------------------------------|-------|------------------------|
| © epd-norway | EPD Norway | | |
| Global Program Operator | Majorstuen P.O. Box 5250, N-0303 Oslo | Email | post@epd-norge.no |
| , | Norway | Web | www.epd-norge.no |
| | Publisher | Phone | +47 23 08 80 00 |
| © epd-norway | The Norwegian EPD Foundation | | |
| Global Program Operator | Post Box 5250 Majorstuen, 0303 Oslo | Email | post@epd-norge.no |
| | Norway | Web | www.epd-norge.no |
| | Owner of the declaration | Phone | +497319341-0 |
| ▼ SCHWENK | SCHWENK Zement GmbH & Co. KG | | |
| A 20UMENY | Hindenburgring 15, 89077 Ulm | Email | info@schwenk.de |
| | Germany | Web | https://www.schwenk.de |
| | Author of the life cycle assesment | Phone | +497319341-0 |
| ▼ SCHWENK | SCHWENK Zement GmbH & Co. KG | | |
| A 20UMENK | Hindenburgring 15, 89077 Ulm | Email | info@schwenk.de |
| | Germany | Web | https://www.schwenk.de |
| ECO PLATFORM | | Web | www.eco-platform.org |
| EPD | ECO Platform | | <u></u> |
| VERIFIED | ECO Portal | Web | ECO Portal |
| | Developer of EPD generator | Phone | +49 176 56 96 77 91 |
| ■ EMIDAT | Emidat GmbH | | |
| E EMIDAT | Sandstraße 33, 80335 München | Email | epd@emidat.com |
| | Germany | Web | www.emidat.com |